



Hylights

Information for hydraulic specialist


Hydraulic top link

TCVNA

Equiped with ball, cable, clip, fork pen, controlled return valve and hook.




Technical information

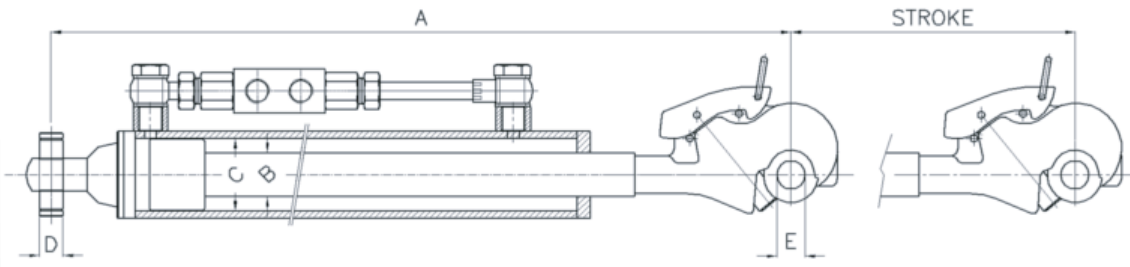

Dimensions toplink (mm)						
Type	A	B	C	D	E	Stroke
TCVNA 3563180K2	505	35	63	20	CAT2	180
TCVNA 3563230K2	555	35	63	20	CAT2	230
TCVNA 3570185K3	540	35	70	25	CAT3	185
TCVNA 3570250K3	605	35	70	25	CAT3	250
TCVNA 4090185K3	565	40	90	25	CAT3	185
TCVNA 4090250K3	640	40	90	25	CAT3	250

Dimensions fork end (mm)				
Type	F	G	H	Wide
306403	19,3	46,5	20	44
TL20202465Z	20,2	46,5	20	44
TL20222465Z	22,2	46,5	20	44
TL20257465Z	25,7	46,5	20	44
TL20282465Z	28,2	46,5	20	44
TL25257630Z	25,7	63	25	51
TL25282630Z	28,2	63	25	51
TL25323630Z	32,3	63	25	51
TL25352630Z	35,2	63	25	51
TL25373630Z	37,3	63	25	51
TL25257100Z	25,7	100	25	51
TL25282100Z	28,2	100	25	51
TL25352100Z	35,2	100	25	51

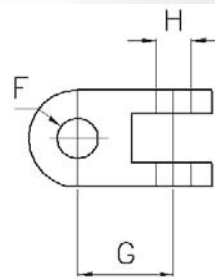

For more information about our full product assortment, stock and prices we refer to our sales department and/or our website at www.kavee.com.



TECHNICAL INNOVATION IS OUR STANDARD

